


AC Current transducer APR-B10

Split core transducer for the electronic measurement distorted AC waveforms current, with galvanic isolation between the primary (High power) and the secondary circuits (Electronic circuit). Switch selectable ranges and True RMS 0-5V and 0-10V switch selectable voltage output.



$I_{PN} = 10 \dots 400 \text{ A}$

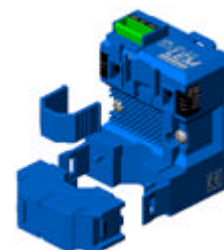

Electrical data

Primary Nominal Current I_{PN} (A.t.RMS)	Analogue Output Signal V_{OUT} (V)	Type
10,25,50	0-5V or 0-10V	APR 50 B10
50,75,100	0-5V or 0-10V	APR 100 B10
100,150,200	0-5V or 0-10V	APR 200 B10
200,300,400	0-5V or 0-10V	APR 400 B10
R_L	Load resistance	$\geq 10 \text{ k}\Omega$
V_C	Supply voltage	+24 $\pm 5\%$ V DC
I_C	Current Consumption	< 30 mA
	Limitation of voltage output (0-10V)	14 V
	Limitation of voltage output (0-5V)	7 V
	Overloaded input current	no limitation

Accuracy-Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$ (without offset)	< ± 1 % of I_{PN}
e_L	Linearity (0 .. $\pm I_{PN}$)	< ± 0.5 % of I_{PN}
V_{OE}	Electrical offset voltage, $T_A = 25^\circ\text{C}$	< ± 0.5 % of I_{PN}
V_{OT}	Thermal drift of V_{OE}	$\pm 1 \text{ mV/K}$
TC_{eG}	Thermal drift of the gain (% of reading)	$\pm 0.1 \text{ %/K}$
t_r	Response time @ 90% of I_p	< 400 ms
f	Frequency bandwidth ($\pm 1\%$)	30 .. 6000 Hz

General data

T_A	Ambient operating temperature	-20 .. +60 $^\circ\text{C}$
T_S	Ambient storage temperature	-20 .. +85 $^\circ\text{C}$
m	Mass	90 g
	Protection type	IP20
d_{Cp}	Creepage distance	5.5 mm
d_{Cl}	Clearance distance	5.5 mm
CTI	Comparative tracking index (Group I)	600 V
	UL94 classification	V0

Insulation category

V_b	Rated Voltage with IEC 61010-1 standards and following conditions : - Single insulation - Over voltage category CAT III - Pollution degree PD2 - None uniform field	300 V
V_d	R.m.s. voltage for AC insulation test, 50Hz, 1mn	5 kV
V_e	R.m.s. voltage for partial discharge extinction @ 10pC	1.5 kV
V_w	Peak impulse withstand voltage 1.2/50 μs	6.1 kV
	If insulated cable is used for the primary circuit, the voltage category could be improved with the following table :	
	Cable insulation (primary)	Category
	HAR 05	600V CAT III
	HAR 07	1000V CAT III

Features

- VFD and SCR waveforms current measurement
- True RMS output
- Split core type
- 5V & 10V switch selectable voltage output
- DIN mounting & Panel mounting
- Eliminates insertion loss
- Switch selectable ranges

Advantages

- Large aperture for cable up to $\varnothing 18\text{mm}$
- High isolation between primary and secondary circuits
- Easy to mount


Applications

- VFD Controlled Loads:
VFD output indicates how the motor and attached load are operating.
- SCR Controlled Loads:
Accurate measurement of phase angle fired or burst fired (time proportioned) SCRs. Current measurement gives faster response than temperature measurement.
- Switching Power Supplies and Electronic Ballasts:
True RMS sensing is the most accurate way to measure power supply or ballast input power.

041029/3

Notes : Installation and maintenance should be done with power supply disconnected.
The operator must have accreditation to install this material.
The users must take care of all protection guarantee against electrical shock.

Dimensions AP(R)-B10 (unit : mm, 1mm = 0.0394 inch)

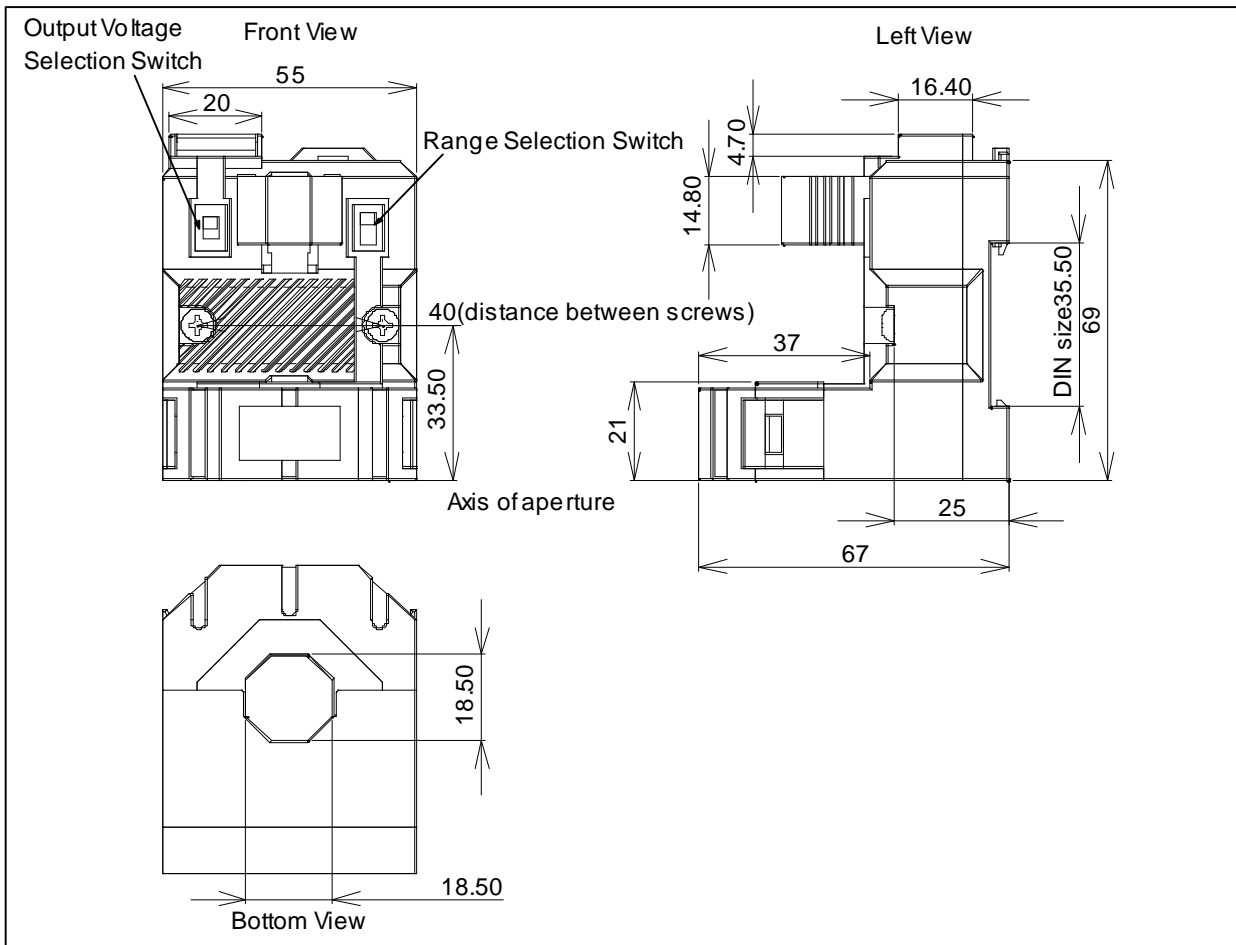

Mechanical characteristics

- General tolerance ± 1 mm
- Primary aperture $\varnothing 18.5$ mm
- Panel mounting 2 holes $\varnothing 4.0$ mm
- Distance between holes 40.0 mm

For panel mounting, replace M4 screws by new one (not supplied) with appropriate length to panel's thickness.

Connections

- Wires up to 2 mm \varnothing

0-5, 10V Selectable

